



PCT/G803/01435




10 / 509862

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

01 OCT 2004

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

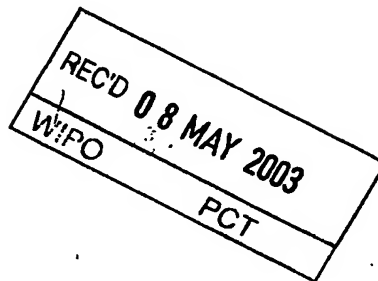

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Gersy

Dated


22 April 2003

Patents Form 1/77

Patents Act 1977
(Rule 16)



02APR02 E707767/1 D02H35
P01/7700-0100-1207546.5

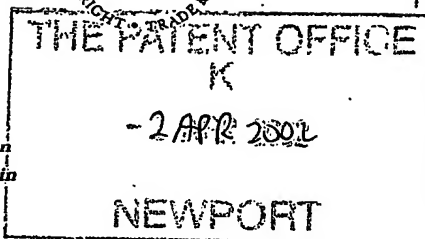

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

SMR/JPM/P550356

2. Patent application number

(The Patent Office will fill in this part)

0207546.3

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Ethos (UK) Limited
Ethos House
52 Tanners Drive
Blakelands
Milton Keynes
MK14 5BW

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

UK

83559.76001

4. Title of the invention

Furniture Support System

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

URQUHART-DYKES & LORD
Midsummer House
411C Midsummer Boulevard
CENTRAL MILTON KEYNES
MK9 3BN

Patents ADP number (*if you know it*)

1644008

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	11
Claim(s)	3
Abstract	1
Drawing(s)	10 + 10 <i>PN</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (<i>Patents Form 7/77</i>)	-
Request for preliminary examination and search (<i>Patents Form 9/77</i>)	1
Request for substantive examination (<i>Patents Form 10/77</i>)	-
Any other documents (<i>please specify</i>)	-

11. I/We request the grant of a patent on the basis of this application.

Signature *Virginia D. Hill* Date 28.03.02

12. Name and daytime telephone number of person to contact in the United Kingdom Mr Simon Raynor - 01908 666645

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

Furniture Support System

The present invention relates to a furniture support system, and in particular, but not exclusively, to a support system for desks and workstations.

- 5 Most desks have a work top that is set at a fixed height above the floor, which is designed to be suitable for a person of average stature. However, this height may not be suitable for people who are unusually tall or short. Furthermore, the ideal height of the work top may depend on the tasks being performed at the desk: for example, a desk designed for typing will generally be lower than one designed for writing.

- 10 Desks with adjustable height work tops are known, but the adjustment mechanism is often complicated and allows the height to be adjusted only incrementally.

- In modern offices desks or workstations are often clustered together, for example two back-to-back, three at 120 degrees or four at 90 degrees. This is usually the case in open plan offices, especially to save space where the rent per unit area is high or where workstations
- 15 have to share essential facilities such as electricity supply. Electrical sockets are often located at intervals in the floor and several workstations may be positioned around them.

- A drawback to clustering workstations is that localised noise is increased making it more difficult for workers to concentrate and the close proximity of other people also makes it difficult to have confidential discussions. A common solution to balancing the need to
- 20 cluster workstations and providing a degree of privacy is to provide partition screens between desks. Partitions are typically opaque rectangular panels which are available in a variety of sizes. For example, some partitions are quite low and can be seen over from a sitting position whilst others are higher and can only be seen over by standing. The screens can be supported in free standing metal frames, with some systems having a facility for
 - 25 linking panels together.

When clustering workstations together, a typical solution is simply to group a number of individual free-standing workstations together without further integration, i.e there is little or no sharing of components between units. A more economical method is to use an

integrated system that allows some components, for example legs, to be shared between adjacent workstations. Such existing systems tend generally to be rather complicated and lacking in versatility.

Accordingly the present invention seeks to provide a furniture support system that mitigates
5 at least one of the aforesaid problems.

According to one aspect of the present invention there is provided a furniture support system including a support post having a first locating formation that extends longitudinally along at least a part of the length of the support post, and a support element having a second locating formation that is complementary to the first locating formation and engageable
10 therewith, the first and second locating formations being constructed and arranged for sliding movement in the longitudinal direction, such that the position of the support element relative to the support post is adjustable.

This invention allows the height of a workstation work top to be adjusted to a height which is comfortable for the person using the workstation when performing a particular activity.

15 Advantageously the position of the support element relative to the support post is continuously adjustable. Continuous adjustment of the support element relative to the post overcomes the limited number of settings to which discrete systems are restricted.

Preferably the first locating formation comprises a channel formed in the surface of the support post. This is a simple and strong mechanism which can be easily adjusted to suit the
20 needs of the person using the workstation. The channel may include a pair of parallel lips defining a mouth, and a channel body located behind the mouth, the mouth being narrower than the channel body.

Advantageously the first locating formation extends along substantially the entire length of the support post. This feature allows a full range of positional settings of the support
25 element relative to the support post and the support post to be manufactured by an extrusion process.

The support element may include locking means for fixing its position relative to the support post. Preferably the locking means comprises a screw element engageable with the support post.

Preferably the support post is substantially cylindrical and preferably the support element
5 comprises a bracket for supporting a workstation work top.

Advantageously the furniture support system can include a screen support member for supporting a partition screen. Preferably the screen support member includes a third locating formation that is complementary to the first locating formation and engageable therewith,
----- the first and third locating formations being constructed and arranged for sliding movement
10 in the longitudinal direction, such that the position of the screen support member relative to the support post is continuously adjustable.

The support post may include a plurality of angularly spaced first locating formations. This allows the support post to support a plurality of components: for example, work tops and partition screens. Using support elements and screen support members a variety of
15 configurations can be achieved to support, for example, a plurality of work tops, or a combination of work tops and partition screens. Since a number of components can share a single support post this leads to a reduction in the number of parts required and hence a reduction in cost.

Preferably the support post includes between three and sixteen first locating formations, or
20 between eight and twelve first locating formations. However, these ranges are by way of example only and the invention is not to be construed as being strictly limited to embodiments having a number of first locating formations within one of these ranges. The invention includes support posts having any practicable number of first locating formations.

The first locating formations preferably extend substantially parallel to one another.

25 Advantageously the support post includes attachment means for connecting two posts end to end. This can extend the height of a support post arrangement, for example, to provide support for a large partition screen and is preferably arranged to allow continuous adjustment through the joint.

The furniture support system can be used in a workstation which includes a work top and a plurality of legs for supporting the work top, wherein at least one of the legs comprises a furniture support system as described above and the position of the work top relative to the support post is adjustable. This allows the user of the workstation to adjust the height
 5 of the work top to an appropriate height, having regard for his stature and the type of work to be performed at the workstation.

Likewise, the furniture support system can be used in a set of workstations which includes a plurality of work tops and a plurality of legs for supporting the work tops, wherein at least one of the legs is arranged to support a plurality of the desk tops and comprises a furniture
 10 support system as described above. The furniture support system is particularly useful when producing a cluster of workstations which are separated by partitions. For example, a single support post can act as a common leg for a plurality of workstation work tops and as a common support member for a plurality of partition screens. Since a single support post can support a plurality of partitions and / or work tops the number of components required is
 15 reduced.

In another example, at least two work tops from the set of workstations can share a support post. Each work top can be supported by a different support element attached to the common support post. Alternatively, a single support element attached to a support post, can be arranged to support two adjacent work tops.

20 An embodiment of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which like references indicate equivalent features, wherein:

Figure 1a is a cross-section of a support post having eight longitudinal channels;

Figure 1b is a detailed cross-section of a channel of the support post of Figure 1a;

25 Figure 1c is a side elevation of the support post of Figure 1a;

Figure 2a is a side elevation of a support element for a work top;

Figure 2b is an end elevation of a support element for a work top;

Figure 2c is a plan view of a support element for a work top;

Figure 3a is a sectional view of a support post and a support element for a partition panel;

Figure 3b is a side elevation of the support element shown in Figure 3a

Figure 4a is a cross-section of a support post having twelve channels;

5 Figure 4b is a detailed cross-section of a channel of the support post of Figure 4a;

Figure 5 is a plan view of a support post having twelve channels, showing location positions for six support elements for partition screens and six support elements for work tops;

Figures 6a-c are top plan, side section and bottom plan views of an end-cap for a support post;

10 Figure 7 is a side-section of a foot for a support post;

Figures 8a-c are top plan, sectional and bottom plan views of an end-cap for a partition support element; and

Figures 9a-b are bottom plan and sectional views of a foot for a partition support element.

Figures 1a-c show a substantially cylindrical support post 1 having eight longitudinal
 15 grooves 3, or channels, that run the entire length of the support post 1. The grooves 3 are arranged in parallel and are equally spaced about the circumference of the support post 1 at an angle of 45 degrees. The support post 1 has an outside diameter of 70mm, and a wall thickness of approximately 2mm although this can vary, particularly around parts of the groove 3. Between adjacent grooves 3 are parts of the support post 1 that define the outer
 20 wall 5 of the support post 1.

Each groove 3 has a uniform arcuate cross-section and is open at each end of the support post 1. A pair of lips 7 run along the longitudinal edges of the groove 3 for the full length of the groove 3, forming a mouth 8. The opposed lips 7 of each groove 3 are parallel to each other and are parallel with the longitudinal direction of the groove 3. The body of the
 25 groove 3 has a maximum width of approximately 13mm and the distance between the lips

7 is approximately 9mm. The maximum depth of the groove 3 is 8mm. Each groove 3 is arranged to receive a support element 9,23.

The support post 1 is preferably extruded from aluminium, an aluminium alloy, or from a plastics material but is not limited to this form of manufacture or material. The support post 1 length is typically in the range 385 - 2340mm, for example, a support post 1 having a length of 685mm can provide a desk height of around 720mm.

Figures 2a-c show a support element 9 used to support a workstation work top. The support element 9 includes a body 11, a rectangular support plate 13 and a support post connector element 15 which has a complementary profile to the profile of the grooves 3.

10 The width and height of the connector element 15 are 12mm and 87mm respectively. The support element 9 has two undercut portions 17 which are complementary to the lips 7 of the groove 3. The lips 7 form retaining walls which prevent the support element 9 from falling out of the groove 3. The support element has two shoulders 19 that are arranged to abut the outer wall 5 of the support post 1. The width of the support element 9 from 15 shoulder to shoulder is 24mm. The support element 9 for a work top is a type of bracket.

The grooves 3 are smooth to allow support elements 9,23 to slide along them. This allows the support elements 9,23 to be easily positioned within the grooves 3 and facilitates easy construction of workstation / partition arrangements. The grooves 3 have substantially identical cross-sectional profiles to enable the interchangeability of support elements 9,23, 20 and likewise, the support elements 9,23 have substantially identical profiled complementary connector elements 15.

The support plate 13 is arranged for attachment to the underside of a workstation work top by bolts and includes a number of countersunk bolt holes 21. Alternatively, the plate 13 can be screwed or adhered to the work top.

25 A hole 22 is formed through the body 11 and the connector element 15 of the support element 9. This hole 22 has a screw thread and is arranged to receive a grubscrew. The overall height of the support element 9, including the plate 13, is 127mm.

The support element 9 is located in a groove 3 by sliding the connector element 15 into the groove 3 at one end of the support post 1. Preferably the fit is tight, but allows the support

element 9 to slide along the groove 3. The two undercut portions 17 are complementary to the groove lips 7 and the shoulders 19 are complementary to the outer wall parts 5. The groove lips 7 retain the support element 9 within the groove 3 when the support post 1 is vertically mounted. The position of the support element 9 relative to the groove 3 is continuously adjustable since the connector element 15 can slide within the groove 3 to the desired position. The position of the support element 9 can then be fixed. Preferably this is achieved by tightening the grub screw in the support element 9 against the support post 1. The grub screw applies pressure to, for example, an inner wall of the groove 3 and thereby fixes the support element 9 in place. We have found that this locking arrangement is sufficiently strong to meet all current statutory requirements.

Variations of this approach can be used for example by forming holes in the support post 1 to locate the support elements 9 in set positions.

Figures 3a-c show views of a support element 23 for a partition screen. The partition support element 23 has a support post connector element 15 and two shoulders 19 as described above, and for the same purpose has the equivalent components of the work top support element 9. The partition support element 23 also includes a cavity 25, which reduces the weight of the support element 23, and a partition connector element 24. The partition connector element 24 includes a male connector member 27, having locking teeth 29, which is positioned between two walls 31. The partition screen is interposed between the walls 31 and the male connector member 27 engages with a female connector socket in the partition screen. The locking teeth 29 in engagement with the female connector socket provide sufficient friction to prevent the partition screen from disengaging from the partition support element 23.

The male connector member 27 can run the full height of the partition support element 23 as shown in the extruded partition support element 23 of Figures 3a-b or, alternatively, may consist of a number of discrete connector members 27 spaced along the height of the partition support element 23.

Figures 4a and 4b show a substantially cylindrical support post 1 having a diameter of 130mm and having twelve longitudinal grooves 3 which run the full length of the support post 1.

The grooves 3 have a uniform arcuate cross-section and are open at each end of the support post 1. Similarly to the support post 1 of Figures 1a-c, each groove 3 has a lip 7 running along each longitudinal edge of the groove 3 to the full length of the groove 3. The opposing lips 7 of each groove 3 are parallel to each other and are parallel with the groove 3. The dimensions of the grooves 3 are substantially the same as the dimensions of the grooves 3 of the eight fluted support post 1 shown in Figures 1a-c.

The outer wall portions 5 of the cylindrical support post 1 of Figures 4a and 4b have slight concave profiles to accommodate the shoulders 19 on the support elements 9,23.

~~The support post 1 of Figures 4a and 4b has a reinforcing structure to strengthen the~~
 10 member. The structure includes a central hub 33, concentric with the outer wall 5 and grooves 3, and spurs 35 that radiate from the central hub 33 to three of the grooves 3. The spurs 35 are angularly spaced at intervals of 120 degrees. The central hub 33 and the spurs 35 run the full length of the support post 1. The hub 33 also has an axial cavity 37 having a diameter of 9mm running the full length of the hub 33.

15 At the spur 35 - groove 3 interface, the spur 35 is hooked, having an internal diameter of 4mm and an opening 39 between the hook tip 41 and the spur 35 of 60 degrees.

Figure 5 shows a support post 1 having a similar configuration to the support post 1 of Figure 4, the main difference being that the spurs 35 radiating from the central hub 33 do not have hook shapes at the groove 3 - spur 35 interface. Instead, the thickness of each spur 35 at the groove 3 - spur 35 interface in the support post 1 of Figure 5 is increased to accommodate a cylindrical cavity 43 having a 4mm diameter.

Although the support posts 1 of Figures 1, 4 and 5 can be manufactured in a variety of sizes, the support posts 1 of Figures 4 and 5 have the additional advantage that two or more support posts 1 can be joined end to end. This is achieved by inserting one end of a rod (not shown) into the cavity of the central hub 33 at one end of a support post 1 and inserting the other end of the rod into the central hub 33 at one end of a second support post 1. Optionally, additional rods (not shown) can be inserted into the hooks at the spur 35 - groove 3 interfaces of the support post 1 of Figure 4 or the cavities 43 at the spur 35 -

groove 3 interfaces of the support post 1 of Figure 5. These additional rods prevent relative angular movement between the connected support posts 1.

For the support post 1 of Figure 4, the additional rods can be snap-fitted into the hooks by twisting the support posts 1 to be connected in opposite directions.

- 5 The operation of the furniture support system will now be described with reference to Figures 1 to 5.

Typically, support posts 1 having a length in the range of 385 - 2340mm are used. The number of support posts 1, work top support elements 9 and partition support elements 23 depends on the desired workstation cluster design. The connector element 15 of each of the
 10 support elements 9,23 is fitted into its respective groove 3 in each of the support posts 1 from one of the ends of the support post 1.

For the work top support elements 9, the length of the connector element 15 is around 87mm which is much shorter than the length of the support post 1, and hence the length of the groove 3. Therefore the position of the work top support element 9 can be adjusted in
 15 its groove 3 such that the top of the plate 13 is set at the appropriate height relative to the floor to support the work top at the desired working height. When the support post 1 is vertically mounted the support plate 13 is substantially horizontal. When the support element 9 has been positioned correctly it is locked in place using the grub screw (see Figures 1a-c).

- 20 The workstation work top is fastened to the plate 13 by bolts or screws as appropriate, each work top being supported generally by at least three support posts 1.

The partition support elements 23 are located in the support post grooves 3 in the same manner as the work top support elements 9, and similarly the position of the partition support element 23 relative to the support post 1 is adjustable. However, the length of the
 25 partition support elements 23 is typically approximately the same length as a support post 1. Therefore the connector element 15 of a partition support element 23 occupies a substantial part of the length of a groove 3 and does not require additional fixing means since, in this arrangement, it is supported by the floor when the support post 1 is vertically mounted on the floor.

Partition screens are inserted into the desired partition connector elements 24, wherein the male connector member 27 on the partition support element 23 engages with the female connector socket in the partition screen, and the locking teeth 29 hold the screen in place.

The assembly of support posts 1, support elements 9,23, work tops and partitions is so
5 arranged to form the desired cluster of partitioned workstations.

Figure 5 shows some of the positions at which the work top and partition support elements 23 can be located in the grooves 3. The support post 1 of Figure 5 has alternating partition support elements 23 and work top support elements 9. The arrangement is not intended to
----- be a practical set-up for a particular workstation cluster design but rather is illustrative that
10 support elements 9,23 can be located in adjacent grooves 3.

The work top support element 9 takes part of the load from a workstation work top and transmits it to the support post 1 and therefore the support system operates as a work top leg. Since a number of work top support elements 9 can be attached to one support post 1, a single support post 1 can act as a leg for a number of workstations.

15 Furthermore, the same support post 1 can incorporate a number of partition support elements 23 which can support partition screens between workstations. A number of support posts 1 can be arranged to fully support a cluster of workstation work tops and partition screens leading to a more integrated and efficient furniture support system.

A set of support posts 1 having at least one work top support element 9 can be arranged to
20 fully support a single workstation work top or a plurality of workstation work tops.

Additionally, a number of other components can optionally be included in the furniture support system, including end-caps 45 for support posts 1 (see Figures 6a-c). The end-caps 45 are essentially a dust cover to prevent foreign objects from entering the support post 1 cavity. The end-caps 45 also provide an improved aesthetic which is desirable in an office
25 environment. A foot 47 may be also be added to the support post 1 to spread the loading over a larger surface area (see Figure 7). End-caps 49 and feet 51 can also be added to the partition support elements 23 for the same reasons as applying to the support posts 1 (see Figures 8a to 9b). The end-caps 45,49 and feet 47,51 are preferably made from a plastics material or from aluminium or an aluminium alloy.

It will be appreciated that alterations can be made to the embodiment described above without departing from the spirit of the present invention. For example, the support post 1 can include any number of grooves 3, the cross-section of the grooves 3 and connector elements 15 can be altered, or the grooves 3 may only run for part of the length of the support post 1.

Other support elements can be used to support other types of furniture such as drawers or filing systems.

In the examples above, the grooves 3 all have the same cross-section, such that any support element 9, 23 can fit into any of the grooves 3. Alternatively, the grooves 3 in a support post 1 can have different profiles such that only certain types of support elements 9, 23 can fit into particular profiled grooves 3. Also, more than one support element 9, 23 can be located in a particular groove 3 to support a number of furniture objects, for example, upper and lower work surfaces.

Other fixing methods can be employed for fixing the workstation work top support elements 9 in place in the support post 1 grooves 3, such as a ratchet system.

Furthermore, the invention is not limited to substantially cylindrical support posts 1, for example, the support posts 1 can have a rectangular or hexagonal cross-section.

Claims

1. A furniture support system including a support post having a first locating formation that extends longitudinally along at least a part of the length of the support post, and a support element having a second locating formation that is complementary to the first locating formation and engageable therewith, the first and second locating formations being constructed and arranged for sliding movement in the longitudinal direction, such that the position of the support element relative to the support post is adjustable.
2. A furniture support system according to claim 1, wherein the position of the support element relative to the support post is continuously adjustable.
3. A furniture support system according to claim 1 or 2, wherein the first locating formation comprises a channel formed in the surface of the support post.
4. A furniture support system according to claim 3, wherein the channel has a pair of parallel lips defining a mouth, and a channel body located behind the mouth, the mouth being narrower than the channel body.
5. A furniture support system according to any one of the preceding claims, wherein the first locating formation extends along substantially the entire length of the support post.
6. A furniture support system according to any one of the preceding claims, wherein the support element includes locking means for fixing its position relative to the support post.
7. A furniture support system according to claim 6, wherein the locking means comprises a screw element engageable with the support post.
8. A furniture support system according to any one of the preceding claims, wherein the support post includes attachment means for connecting two posts end to end.
9. A furniture support system according to any one of the preceding claims, wherein the support post is substantially cylindrical.

10. A furniture support system according to any one of the preceding claims, wherein the support element comprises a bracket for supporting a workstation work top.
11. A furniture support system according to any one of the preceding claims, including a screen support member for supporting a partition screen.
- 5 12. A furniture support system according to claim 11, wherein the screen support member includes a third locating formation that is complementary to the first locating formation and engageable therewith, the first and third locating formations being constructed and arranged for sliding movement in the longitudinal direction, such that the position of the screen support member relative to the support post is

10 continuously adjustable.
13. A furniture support system according to any one of the preceding claims, wherein the support post includes a plurality of angularly spaced first locating formations.
14. A furniture support system according to claim 13, wherein the support post includes between three and sixteen first locating formations.
- 15 15. A furniture support system according to claim 14, wherein the support post includes between eight and twelve first locating formations.
16. A furniture support system according to any one of claims 13 to 15, wherein the first locating formations extend substantially parallel to one another.
17. A workstation including a work top and a plurality of legs for supporting the work
20 top, wherein at least one of the legs comprises a furniture support system according to any one of the preceding claims and the position of the work top relative to the support post is adjustable.
18. A set of workstations including a plurality of work tops and a plurality of legs for supporting the work tops, wherein at least one of the legs is arranged to support a
25 plurality of the desk tops and comprises a furniture support system according to any one of claims 13 to 16.

19. A furniture support system substantially as described herein with reference to the accompanying drawings.
 20. A workstation substantially as described herein with reference to the accompanying drawings.
 - 5 21. A set of workstations substantially as described herein with reference to the accompanying drawings.
-

Abstract

Furniture Support System

A furniture support system for workstation work tops including a support post (1) having a first locating formation (3) that extends longitudinally along at least a part of the length of the support post (1), and a support element (9,23) having a second locating formation (15) that is complementary to the first locating formation (3) and engageable therewith, the first and second locating formations (3,15) being constructed and arranged for sliding movement in the longitudinal direction, such that the position of the support element (9,23) relative to the support post (1) is adjustable.

10 (Figure 1)

1/10

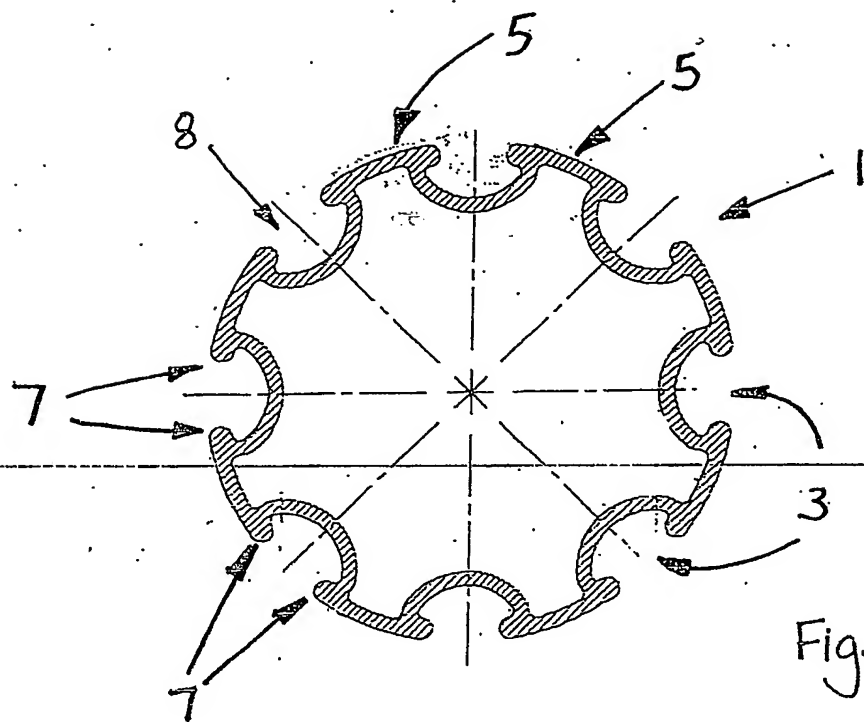


Fig. 1a

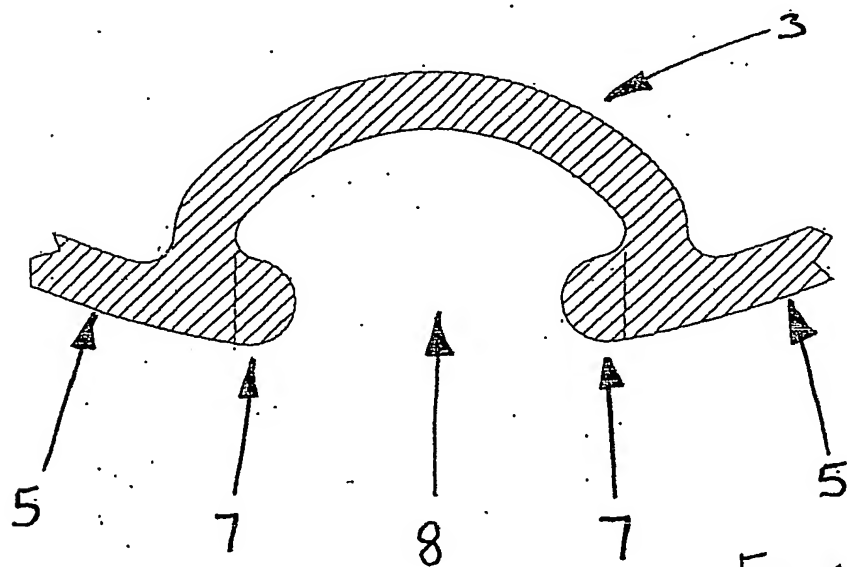


Fig. 1b

2/10

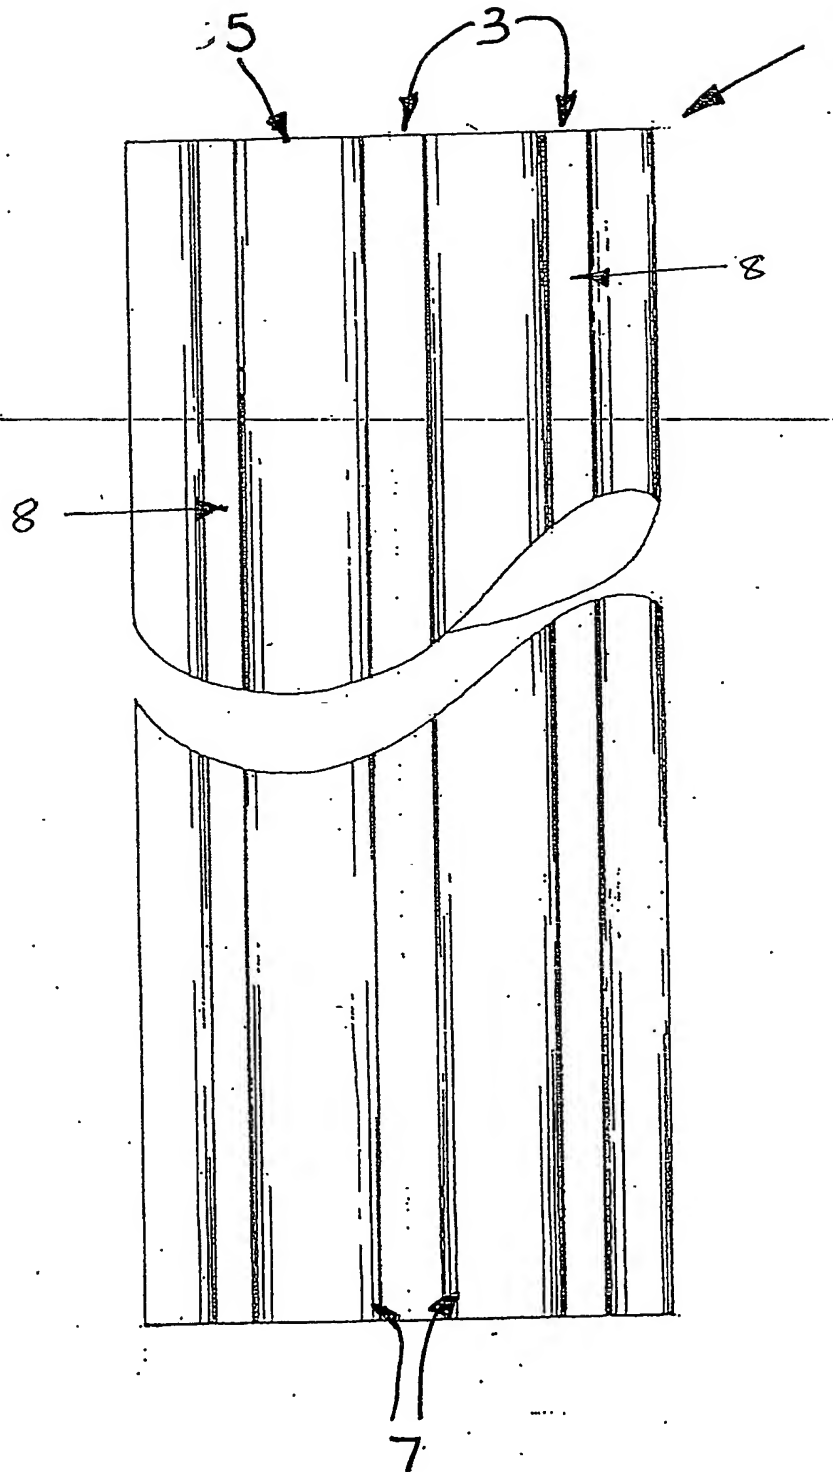


Fig.1c

21

11

15.

22.

Fig. 2a

9

- 13

21

-21


19

17

17

19

Fig. 2c

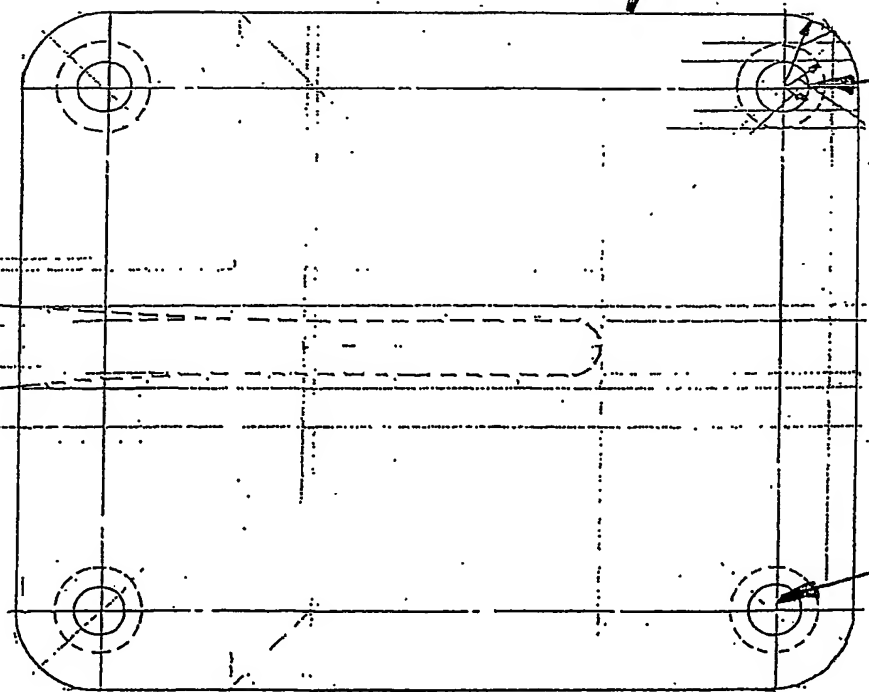

4/10

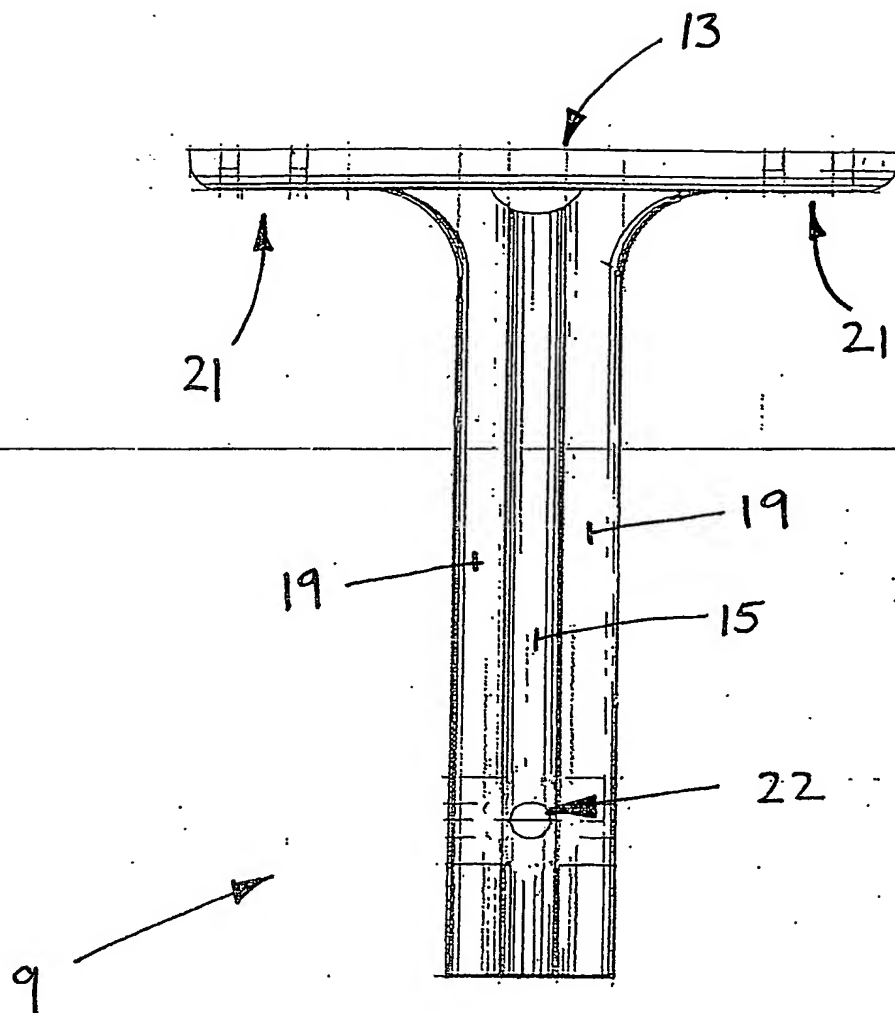


Fig. 2b

5/10


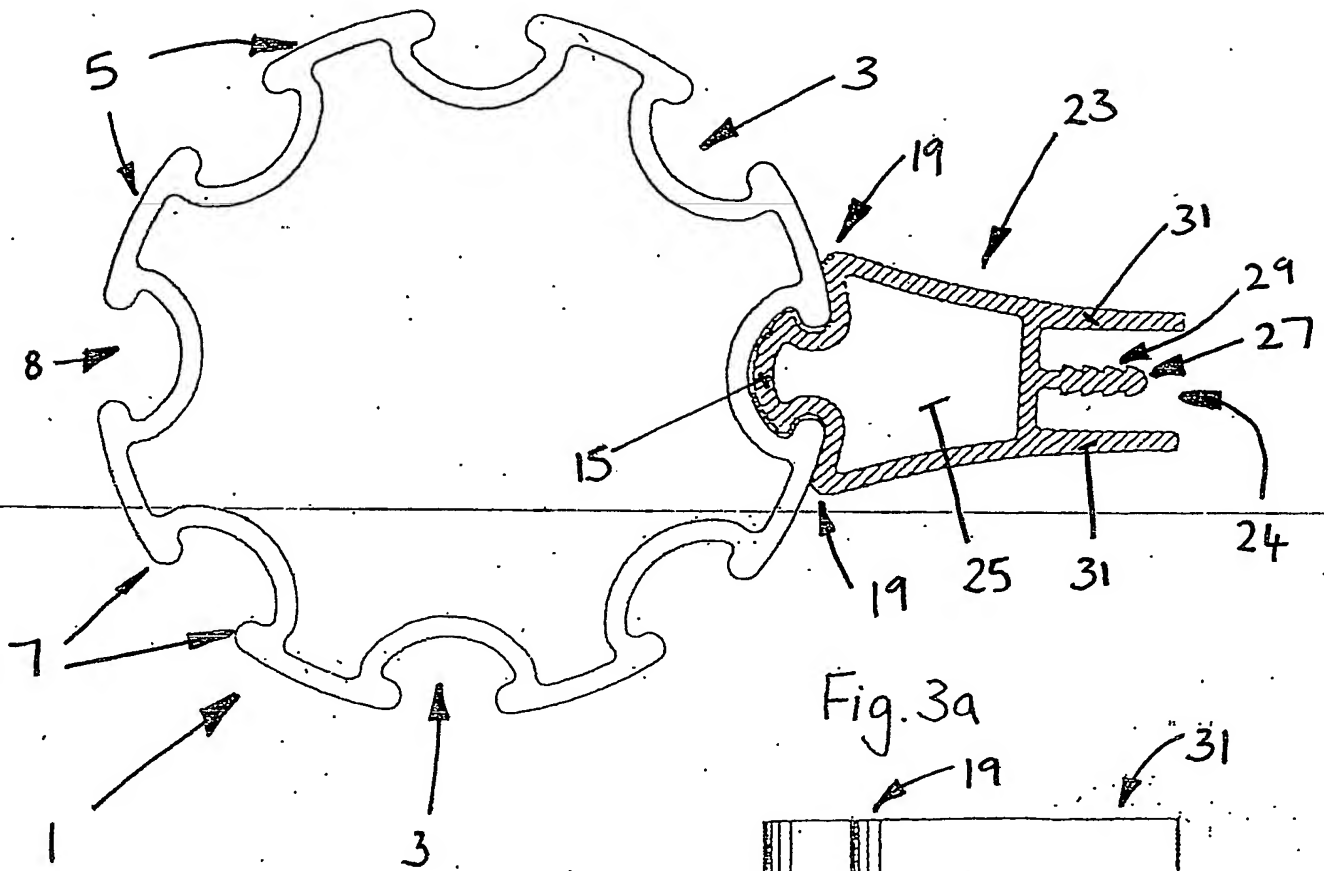


Fig. 3a

Fig. 3b

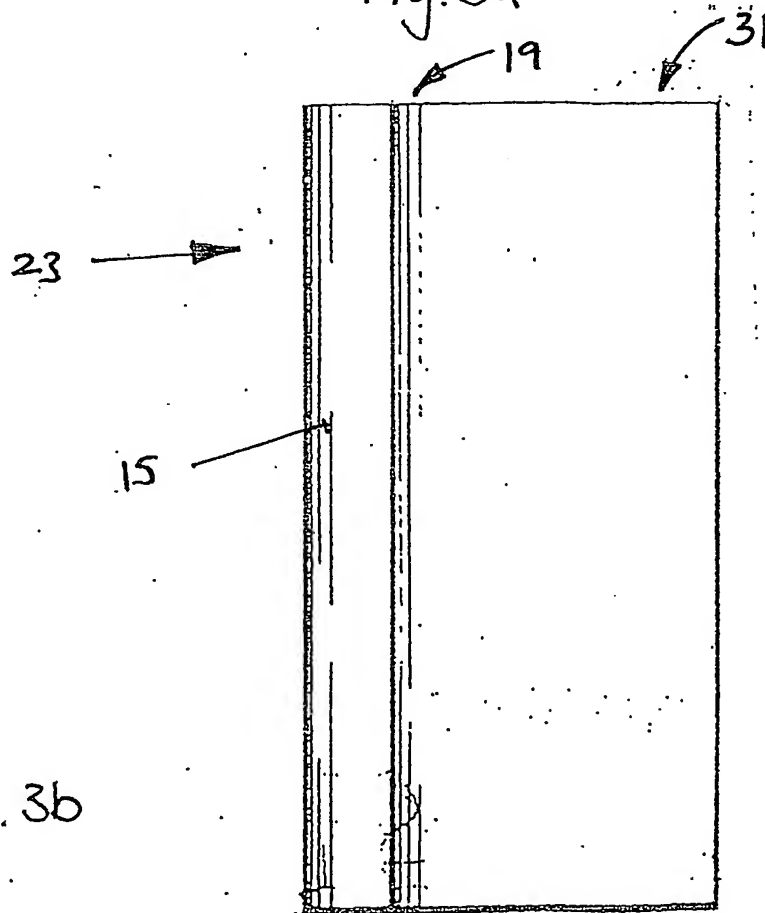

6/10

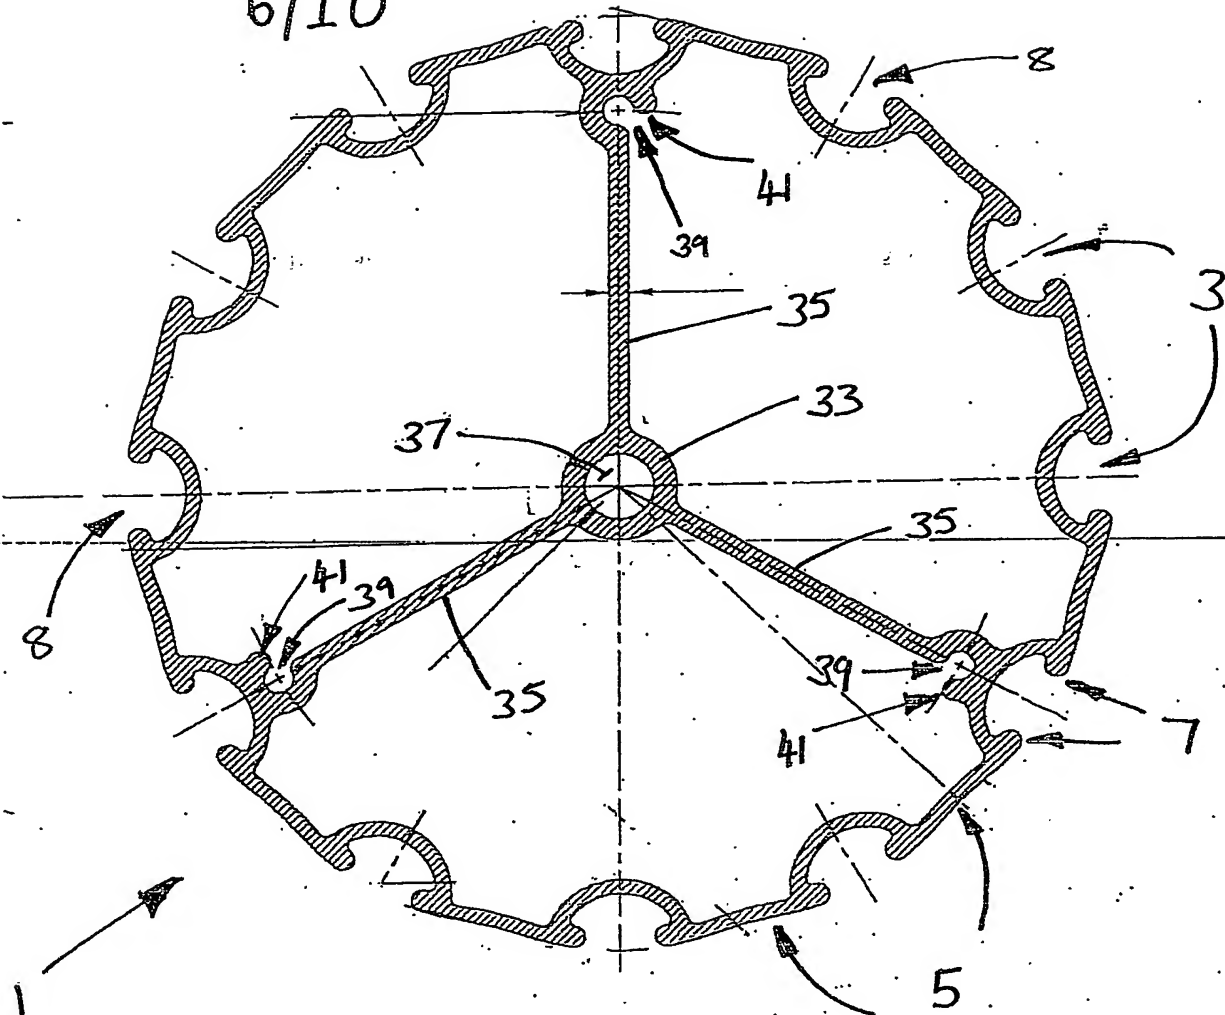


Fig. 4a

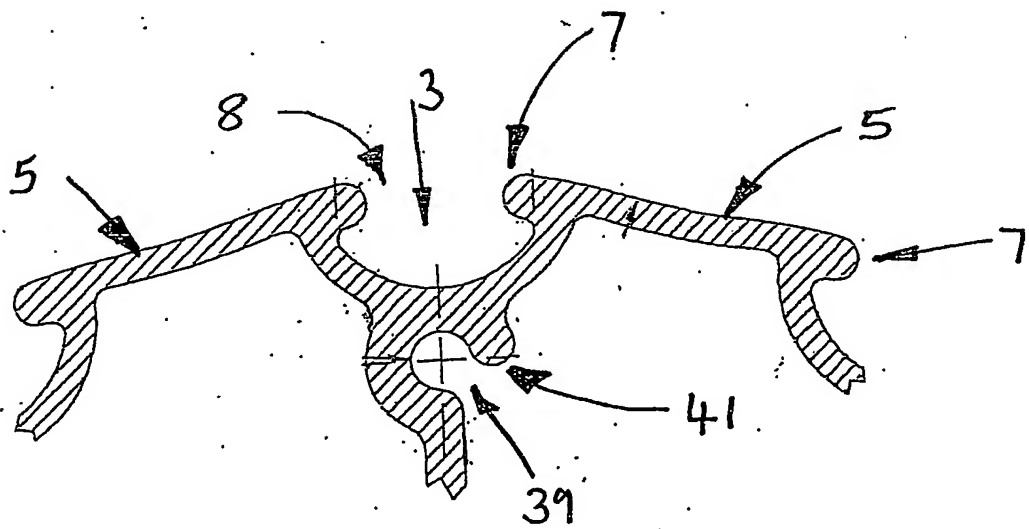


Fig. 4b

7/10

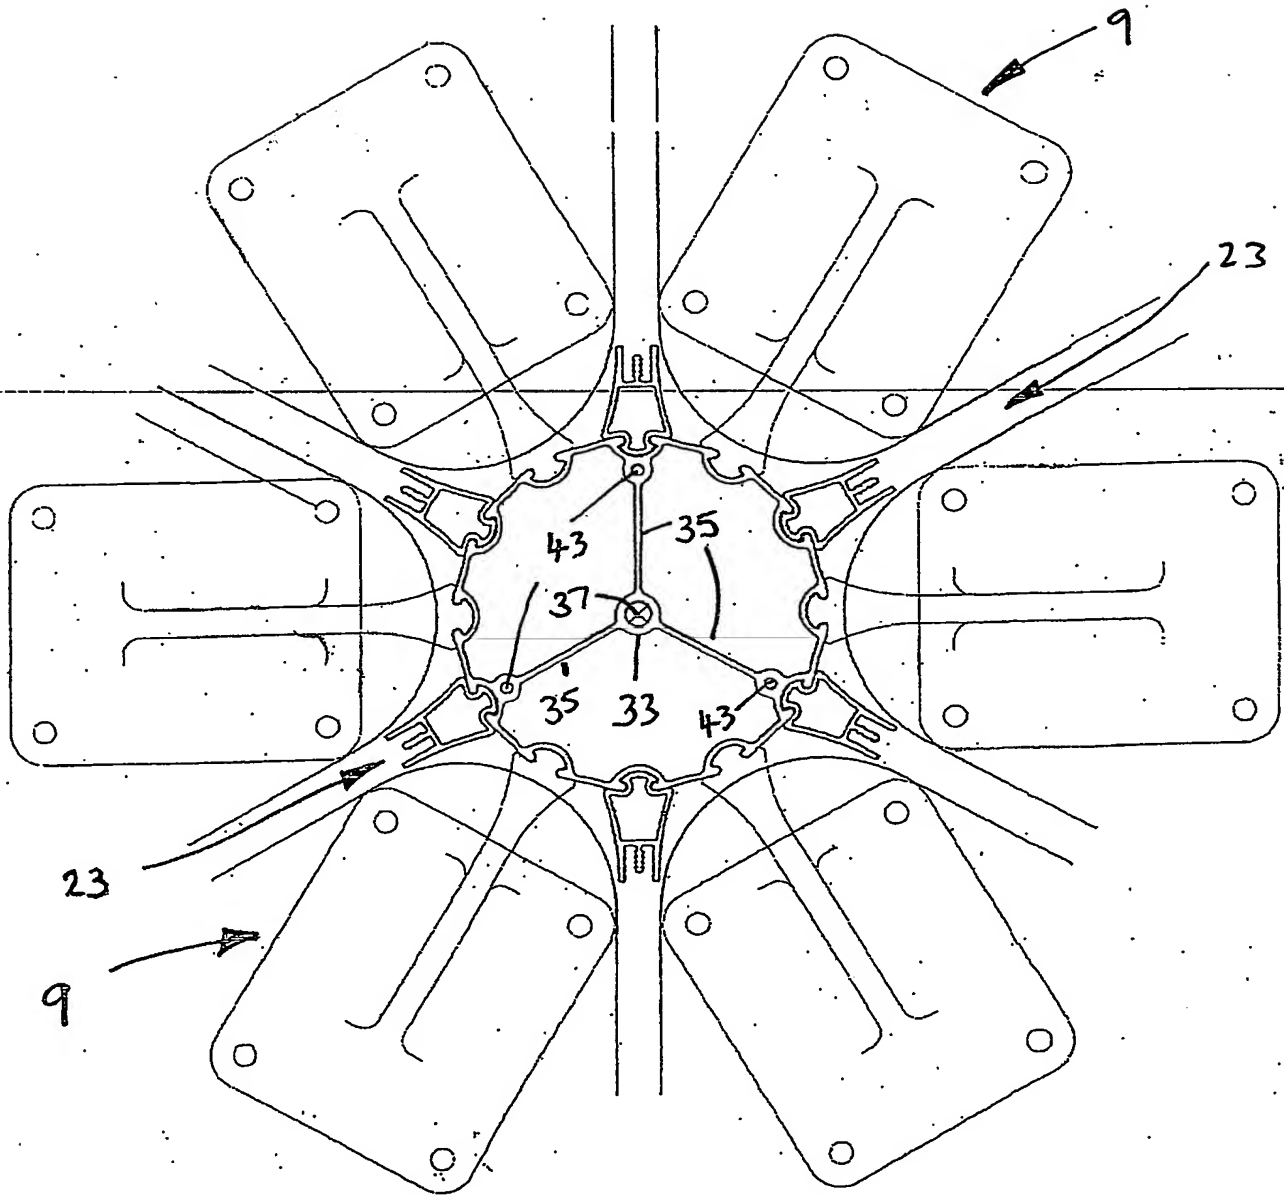


Fig. 5

8/10

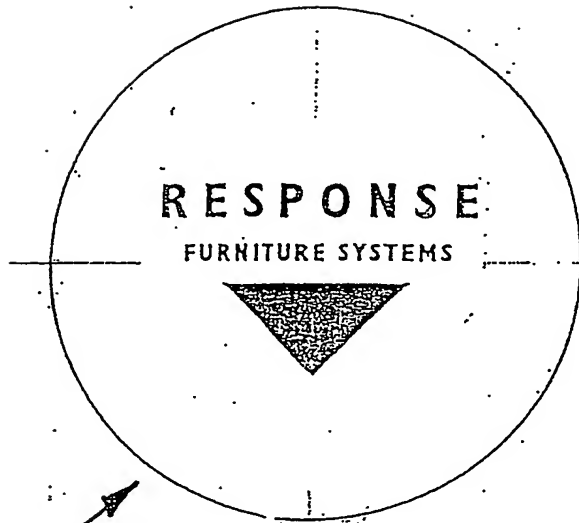


Fig. 6a

45

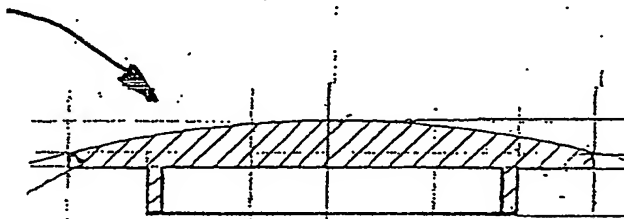


Fig. 6b

45

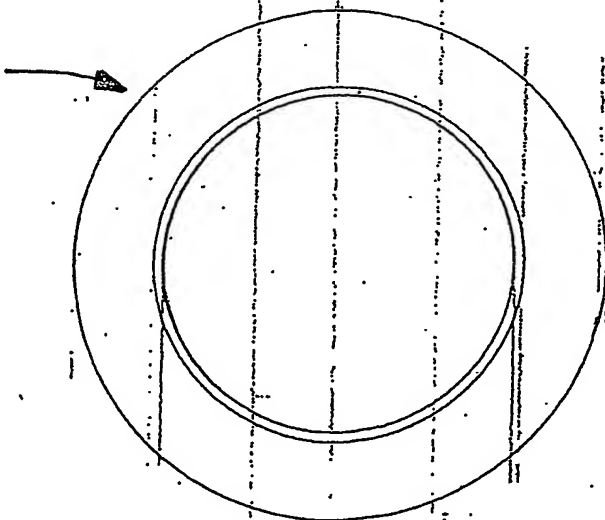


Fig. 6c

9/10

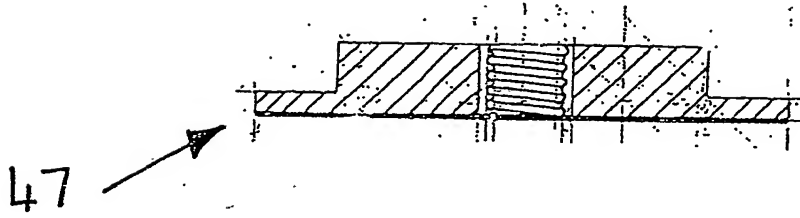


Fig. 7




Fig. 8a




Fig. 8b


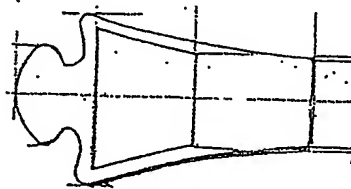


Fig. 8c

10/10

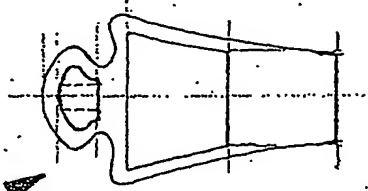

51

Fig. 9a




Fig. 9b

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.